




Impocom Chile SpA

TRITURADORA METAL, PLASTICO Y MADERA



TRITURADORA IMP-1400 (STD)

IMP-1400

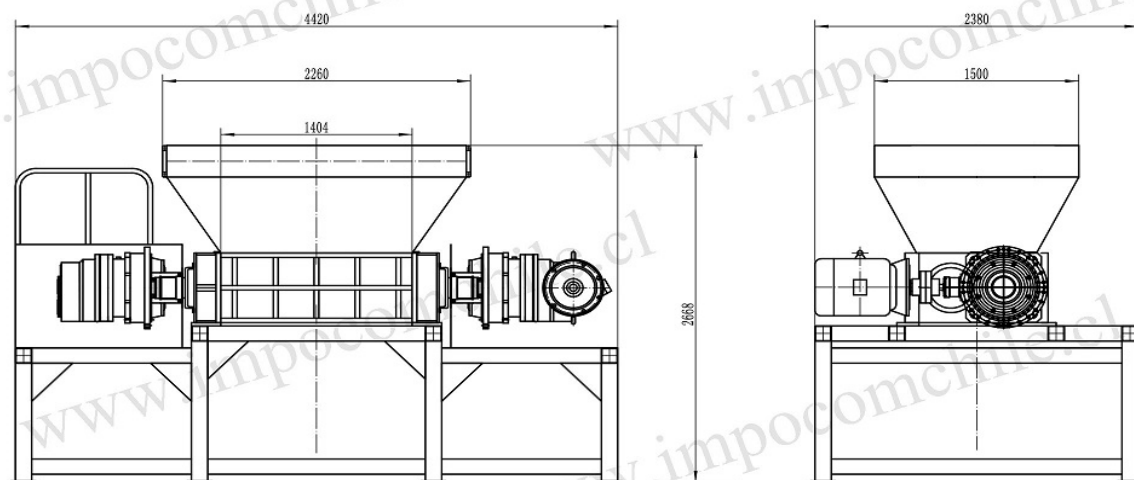

Impocom Chile SpA



Impocom Chile SpA

TRITURADORA METAL, PLASTICO Y MADERA





Impocom Chile SpA

TRITURADORA METAL, PLASTICO Y MADERA





Impocom Chile SpA

TRITURADORA METAL, PLASTICO Y MADERA





Impocom Chile SpA

TRITURADORA METAL, PLASTICO Y MADERA



Main form	Model	IMP-1400
	Capacity	10T/H
	Work chamber size (mm)	1406*950
	Matched power (kw)	55KW * 2 Sets (100% pure copper motor by China Brand)
	Model of reducer	ZSY Hard tooth surface reducer
	Weight (kgs)	14800
	Overall size (mm)	4420*2380*2668mm
	Machine frame	175*175 H-type steel welded
Blade	Blade quantity(piece)	14
	Material of blade	H13
	Blade hardness range	≥55-60HRC
	Blade diameter (mm)	450
	Blade thickness (mm)	100
	Blade shape	External teeth use a small hook angle outside the triangle steep angle tooth type, within the use of internal hexagonal type (The final blades shape will be confirmed with clients after the order is booked.)
	Blade teeth (piece)	5
Shaft	Raw material	42crmo heat treatment quenching and tempering high frequency



Impocom Chile SpA

TRITURADORA METAL, PLASTICO Y MADERA



Sleeve	Raw Material	9SICR
	Quantity(piece)	14
Bearing	Spec & manufacturer	ZWZ brand P Grade Bearing (Self-aligning roller bearing with locking sleeve)
Connection	Main machine connection way	The reducer and the motor are connected by rubber belt
Control electric cabinet	Start up way	Star delta connection to Start(Including inverter) Chint electric (transducer and contactor) with soft start
	Protection	Automatically reverse when electric current overloaded
	Emergency Stop	Emergency Stop

Valor considera Maquina puesta en Puerto mas cercano.
Descuento Adicional por cierre anticipado.
Vigencia Cotizacion 5 dias habiles

Ante cualquier consulta, no dude en contactarnos: